

1222FX

XENYX

Specifications

Version 1.0 January 2006




XENYX 1222FX

XENYX

Premium 16-Input 2/2-Bus Mixer with XENYX Mic Preamps, British EQs, 24-Bit Multi-FX Processor and USB/Audio Interface

- ▲ Premium ultra low-noise, high headroom analog mixer
- ▲ 4 state-of-the-art XENYX Mic Preamps comparable to standalone boutique preamps
- ▲ Neo-classic “British” 3-band EQs for warm and musical sound
- ▲ Studio-grade 24-bit stereo FX processor with 100 awesome presets including reverb, chorus, flanger, delay, pitch shifter and various multi-effects
- ▲ USB/Audio Interface included to connect directly to your computer
- ▲ 7-band stereo graphic EQ allows precise frequency correction of monitor or main mixes
- ▲ Revolutionary FBQ Feedback Detection System instantly reveals critical frequencies
- ▲ Breathtaking XPQ 3D stereo surround effect for more vitality and enhanced stereo image
- ▲ Voice Canceller function for easy-to-use sing-along applications
- ▲ 4 fully equipped stereo input channels featuring 2 additional mic inputs on channels 5/6 and 7/8, 3-band EQ and input trim control
- ▲ Channel inserts on each mono channel for flexible connection of outboard equipment
- ▲ 2 aux sends per channel: 1 pre fader for monitoring, 1 post fader (for internal FX and/or as external send); 2 multi-functional stereo aux returns
- ▲ Balanced main mix outputs with gold-plated XLR connectors, headphone/control room output and stereo tape outputs
- ▲ Long-wearing 60-mm logarithmic-taper faders and sealed rotary controls
- ▲ Internal autorange power supply for maximum flexibility (100 - 240 V~), noise-free audio, superior transient response plus low power consumption for energy saving
- ▲ Rack mount brackets included for ultimate flexibility
- ▲ High-quality component components and exceptionally rugged construction ensure long life
- ▲ Conceived and designed by BEHRINGER Germany

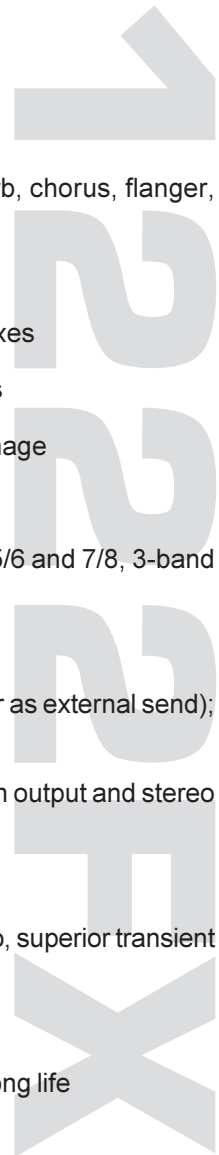

SPECIFICATIONS

Mono inputs

Microphone inputs (XENYX Mic Preamp)

Type	XLR, electronically balanced, discrete input circuitry
Mic E.I.N. (20 Hz - 20 kHz)	
@ 0 Ω source resistance	-134 dB / 135.7 dB A-weighted
@ 50 Ω source resistance	-131 dB / 133.5 dB A-weighted
@ 150 Ω source resistance	-129 dB / 130.5 dB A-weighted

Frequency response	<10 Hz - 150 kHz (-1 dB), <10 Hz - 200 kHz (-3 dB)
--------------------	---

Gain range	+10 to +60 dB
Max. input level	+12 dBu @ +10 dB Gain
Impedance	approx. 2.6 k Ω balanced
Signal-to-noise ratio	110 dB / 112 dB A-weighted (0 dBu In @ +22 dB Gain)

Distortion (THD+N)	0.005% / 0.004% A-weighted
--------------------	----------------------------

Line input

Type	1/4" TRS connector, electronically balanced
Impedance	approx. 20 k Ω balanced 10 k Ω unbalanced
Gain range	-10 to +40 dB
Max. input level	+22 dBu @ 0 dB Gain

Fade-out attenuation¹ (Crosstalk attenuation)

Main fader closed	98 dB
Channel muted	85 dB
Channel fader muted	85 dB

Frequency response

Microphone input to main out	
<10 Hz - 90 kHz	+0 dB / -1 dB
<10 Hz - 160 kHz	+0 dB / -3 dB

Stereo inputs

Channels 5/6, 7/8	
Microphone input	
Type	XLR microphone connector, electronically balanced
Impedance	approx. 2.6 k Ω balanced
Gain range	0 dB to +40 dB
Max. input level	+2 dBu

Stereo inputs

Type	2 x 1/4" TRS connector, unbalanced
Impedance	approx. 40 k Ω @ 0 dB Gain
Gain range	-20 dB to +20 dB
Max. input level	+22 dBu @ 0 dB Gain

Channels 9/10, 11/12

Type	2 x 1/4" TRS connector, unbalanced
Impedance	approx. 40 k Ω @ 0 dB Gain
Gain range	-20 dB to +20 dB
Max. input level	+22 dBu @ 0 dB Gain

CD/tape in

Type	RCA connectors
Impedance	approx. 10 k Ω
Max. input level	+22 dBu

EQ mono channels

Low	80 Hz / ± 15 dB
Mid	2.5 kHz / ± 15 dB
High	12 kHz / ± 15 dB

Low cut	80 Hz, 18 dB/oct.
---------	-------------------

EQ stereo channels

Low	80 Hz / ± 15 dB
Mid	2.5 kHz / ± 15 dB
High	12 kHz / ± 15 dB

MON/FX send

Type	1/4" TS connector, unbalanced
Impedance	approx. 120 Ω
Max. output level	+22 dBu

Aux returns

Type	1/4" TRS connector, unbalanced
Impedance	approx. 10 k Ω
Max. input level	+22 dBu

Main outputs

Type	XLR, electronically balanced
Impedance	approx. 240 Ω balanced / 120 Ω unbalanced
Max. output level	+28 dBu

Headphone output

Type	1/4" TRS connector, unbalanced
Max. output level	+19 dBu / 150 Ω (+25 dBm)

CD/tape out

Type	RCA connectors
Impedance	approx. 1 k Ω
Max. output level	+22 dBu

DSP

Converter	Texas Instruments® 24-bit Sigma-Delta, 64/128-times oversampling
Sampling rate	40 kHz

Main mix system data²

Noise	
Main mix @ - ∞ , Channel fader - ∞	-99 dB / -101 dB A-weighted
Main mix @ 0 dB, Channel fader - ∞	-84 dB / -87 dB A-weighted
Main mix @ 0 dB, Channel fader @ 0 dB	-80 dB / -82 dB A-weighted

Power supply

Mains Voltage	100 - 240 V~, 50 - 60 Hz
Power consumption	40 W
Fuse	T 1.6 A H 250 V
Mains connection	Standard IEC receptacle

Physical

Dimensions (H x W x D)	approx. 97 mm (3 7/8") x 345 mm (13 18/32") x 334 mm (13 5/32")
Weight (net)	approx. 3.80 kg (8.38 lbs.)

Measuring conditions:

- 1 kHz rel. to 0 dBu; 20 Hz - 20 kHz; line input; main output; unity gain.
- 20 Hz - 20 kHz; measured at main output. Channels 1 - 4 unity gain; EQ flat; all channels on main mix; channels 1/3 as far left as possible, channels 2/4 as far right as possible. Reference = +6 dBu.

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may differ from those listed or illustrated.

Technical specifications and appearance subject to change without notice. The information contained herein is correct at the time of printing. The names of companies, institutions or publications pictured or mentioned and their respective logos are registered trademarks of their respective owners. Their use neither constitutes a claim of the trademarks by BEHRINGER® nor affiliation of the trademark owners with BEHRINGER®. BEHRINGER® accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph or statement contained herein. Colours and specification may vary slightly from product. Products are sold through our authorised dealers only. Distributors and dealers are not agents of BEHRINGER® and have absolutely no authority to bind BEHRINGER® by any express or implied undertaking or representation. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of BEHRINGER Spezielle Studioteknik GmbH. BEHRINGER® is a registered trademark.

ALL RIGHTS RESERVED. © 2006 BEHRINGER Spezielle Studioteknik GmbH,
Hanns-Martin-Schleyer-Str. 36-38, 47877 Willich-Münchheide II, Germany.
Tel. +49 2154 9206 0, Fax +49 2154 9206 4903
